

Superreel® - Industrial Reel

ESDH660F SERIES



FEATURES

- To handle live electric cable/cord.
- Heavy duty. All-steel construction.
- For two single hoses with bigger diameter and bigger usable hose length, with additional middle flange
- Available in Left or Right version
- Fixation by mounting flangel
- Self winding by permanent spring force
- Full flow shaft swivels.
- Superior performance: Swivel and reel ball bearings reduce torque load on power spring for smooth retraction and durability.
- Corrosion resistant: Sealed bearings prevent contamination and minimize maintenance.

1




WWW.SUPERREEL.COM

Email: sales@superreel.com

Superreel® - Industrial Reel

- Easy installation and maintenance: Factory lubricated one-piece power spring cassette make installation safer and maintenance easier.
- Adjustable and Versatile: Guide arm adjust to wall, floor, vehicle, overhead positions. Narrow design allows for maximum use of available space.

DIMENSIONS

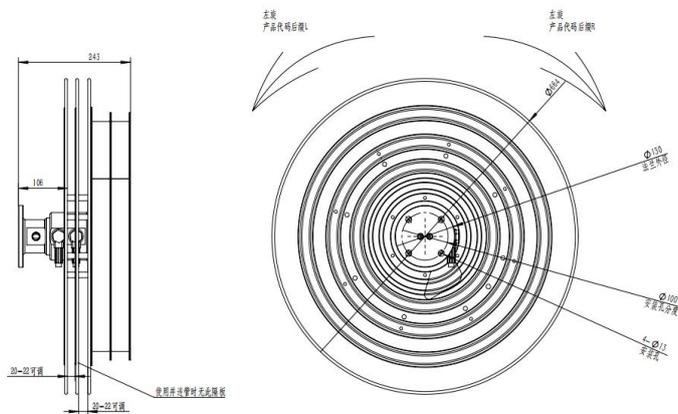

P/N	Port & core number	HOSE-ID. or CABLE-square	Pressure or I max	Working Length	Reel inlet	Hose outlet	A	B	C	D	E	F	G	H	I	J
ESDH600F0201220015	2	1/4"	22MPA	15m	M22*1.5.M	M22*1.5.F	660	220	660	243	660	130	130	100	100	4
ESDH600F0204220012	2	1/2"	22MPA	12m	M22*1.5.M	M22*1.5.F	660	220	660	243	660	130	130	100	100	4
ESDH660F static pressure: 35MPA, dynamic pressure: 22MPA							Dimensions are in millimeters									

