

# Superreel® - Industrial Reel

## ASSC500S SERIES



## FEATURES

- To handle live electric cable/cord.
- Professional grade heavy duty steel construction.
- Silver alloy slip ring.
- Reel drive springs manufactured from high-quality, scaleless blue tempered steel.
- Durable abrasion and corrosion resistant baked-on power coat finish.
- Adjustable bumper stop allow any desired length of cord or cable to be maintained outside the reel.
- Automatic spring retraction for quick cord rewind.
- Compact for critical space requirements.


## DIMENSIONS



**WWW.SUPERREEL.COM**

Email: [sales@superreel.com](mailto:sales@superreel.com)

# Superreel® - Industrial Reel

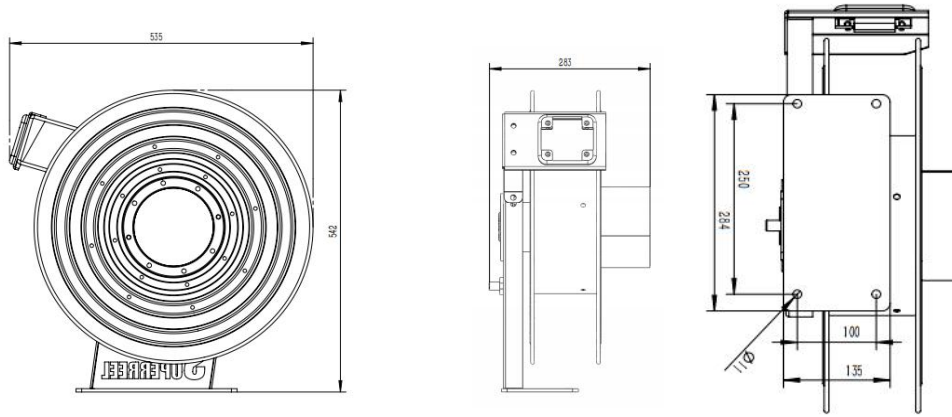

P/N	Port&core number	HOSE-ID. or CABLE-square	Pressure or I <sub>max</sub>	Working length	Reel inlet	Cable outlet	A	B	C	D	E	F	G	H	I	J	K
ASSC500S0405010025	4	1.5 <sup>2</sup>	10A	25m	Bare wire	Bare wire	475	270	543	283	535	135	284	100	250	4	11
ASSC500S0406020025	4	2.5 <sup>2</sup>	20A	25m	Bare wire	Bare wire	475	270	543	283	535	135	284	100	250	4	11
ASSC500S0408030025	4	4 <sup>2</sup>	30A	25m	Bare wire	Bare wire	475	270	543	283	535	135	284	100	250	4	11
ASSC500S0409050025	4	6 <sup>2</sup>	50A	25m	Bare wire	Bare wire	475	270	543	283	535	135	284	100	250	4	11
ASSC500S0410065020	4	10 <sup>2</sup>	65A	20m	Bare wire	Bare wire	475	270	543	283	535	135	284	100	250	4	11
Suitable for super flexible cable							Dimensions are in millimeters										

